

# ULTIMA WHITE

## KEY CENTER PIVOT WHITE PAINTED ROOF WINDOW



VARIANT	1210
<b>PANE</b>	
Construction	33.2SSV6-10G3-6HV9:N2
22 mm double glazing	✓
Low E	✓✓
Gas	Krypton
Toughened	✓
Laminated	✓
$U_g$ (W/m <sup>2</sup> K)	0.9
Total solar energy transmittance	0.3
<b>WINDOW</b>	
$U_w$ (W/m <sup>2</sup> K)	1.2
Water tightness	E1350
Air permeability	Class 4
Resistance to wind load	Class C4*
Sound reduction	38 [-1,-3] dB
Ventilation valve	✓
<b>COLOUR</b>	
White (painted)	✓

\* M10A, P8A, S8A, U4A, U8A: npd



NEXT 20  
GUARANTEE



MAX PROTECT



MASTER WOOD



QUICK INSTALL



NOISE BLOCK



SAFE GUARD



COMFORT GLASS



TITAN GLASS



WHITE DESIGN

### APPLICABLE

- For public and domestic buildings
- For heated, inhabited rooms
- For a roof pitch range of 15-90°
- Suitable for all common roofing with proper flashing

### FEATURES

- Centre pivot
- **NOISE BLOCK - Sound reducing technology**
  - Advanced cladding system with sound absorbing lining
  - Two layers of sound reducing tear resistant foil
  - 6 mm thick toughened external glass pane
- **COMFORT GLASS - Reflective but protective pane**
  - Two different layers of heat reflecting and sun protective coatings on each pane
  - Krypton filled pane construction
- **SAFE GUARD - Safety and damage protection system**
  - Laminated pane
  - Two layers of sound reducing tear resistant foil
  - Toughened 6 mm thick external glass
- IFC - insulation foam collar, free of charge

- **QUICK INSTALL - RUC roofing underfelt foil collar, free of charge**
- Two passive ventilation positions via handle
- Ventilation valve
- **20 YEARS GUARANTEE**
  - 20 years guarantee without window registration
- **TITAN GLASS - self cleaning coating**
- Extra welded sliding gasket

### MATERIAL | WOOD AND FINISHING

#### MASTER WOOD - kiln-dried laminated pine wood

- Timber from FSC certified forests
- Fungicide protection
- Water-based white paint

### COVER PARTS

- Aluminium, lacquered, RAL 7043

### HANDLE

- New, ergonomically designed moulded zinc handle, lacquered

### HINGE

- Pivot hinge



# TECHNICAL DATA

## MEASURES [cm]

CODE	NOMINAL SIZE	FRAME EXTERNAL SIZE		PANE SIZE		VISIBLE GLASS		
		WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	EFFECTIVE LIGHT AREA m <sup>2</sup>
KEV C4A	55x98	55	97,8	39,8	84,9	37,3	79	0.295
KEV F4A	66x98	66	97,8	50,8	84,9	48,3	79	0.382
KEV F6A	66x118	66	117,8	50,8	104,9	48,3	99	0.478
KEV M4A	78x98	78	97,8	62,8	84,9	60,3	79	0.476
KEV M6A	78x118	78	117,8	62,8	104,9	60,3	99	0.597
KEV M8A	78x140	78	139,8	62,8	126,9	60,3	121	0.729
KEV M10A	78x160	78	159,8	62,8	146,9	60,3	141	0.850
KEV P6A	94x118	94	117,8	78,8	104,9	76,3	99	0.755
KEV P8A	94x140	94	139,8	78,8	126,9	76,3	121	0.925
KEV S6A	114x118	114	117,8	98,8	104,9	96,3	99	0.953
KEV S8A	114x140	114	139,8	98,8	126,9	96,3	121	1.165
KEV U4A	134x98	134	97,8	118,8	84,9	116,3	79	0.919
KEV U8A	134x140	134	139,8	118,8	126,9	116,3	121	1.407

## FLASHING COMPATIBILITY TABLE

## ACCESSORIES COMPATIBILITY TABLE


CODE	SLATE FLASHING	TILE FLASHING	UNIVERSAL FLASHING	BLACKOUT BLIND	ROLLER BLIND	VENETIAN BLIND	ANTI HEAT BLIND	ROLLER SHUTTER
KEV C4A	KSF C4A	KTF C4A	KUF C4A	DUR C4A	RHR CXA	PAR C4A	MIR CXA	SHR C4A
KEV F4A	KSF F4A	KTF F4A	KUF F4A	DUR F4A	RHR FXA	PAR F4A	MIR FXA	
KEV F6A	KSF F6A	KTF F6A	KUF F6A	DUR F6A	RHR FXA	PAR F6A	MIR FXA	SHR F6A
KEV M4A	KSF M4A	KTF M4A	KUF M4A	DUR M4A	RHR MXA	PAR M4A	MIR MXA	SHR M4A
KEV M6A	KSF M6A	KTF M6A	KUF M6A	DUR M6A	RHR MXA	PAR M6A	MIR MXA	SHR M6A
KEV M8A	KSF M8A	KTF M8A	KUF M8A	DUR M8A	RHR MXA	PAR M8A	MIR MXA	SHR M8A
KEV M10A	KSF M10A	KTF M10A	KUF M10A	DUR M10A	RHR MXA	PAR M10A	MIR MXA	
KEV P6A	KSF P6A	KTF P6A	KUF P6A	DUR P6A	RHR PXA	PAR P6A	MIR PXA	
KEV P8A	KSF P8A	KTF P8A						
KEV S6A	KSF S6A	KTF S6A	KUF S6A	DUR S6A	RHR SXA	PAR S6A	MIR SXA	SHR S6A
KEV S8A	KSF S8A	KTF S8A	KUF S8A	DUR S8A	RHR SXA	PAR S8A	MIR SXA	
KEV U4A	KSF U4A	KTF U4A	KUF U4A	DUR U4A	RHR UXA	PAR U4A	MIR UXA	
KEV U8A	KSF U8A	KTF U8A	KUF U8A	DUR U8A	RHR UXA	PAR U8A	MIR UXA	

Please check the combi flashing compatibility table as well.

## COMFORT GLASS 1200

Reflective but protective pane with excellent noise reduction parameters.

**33.2SSV6-10G3-6HV9:N2**

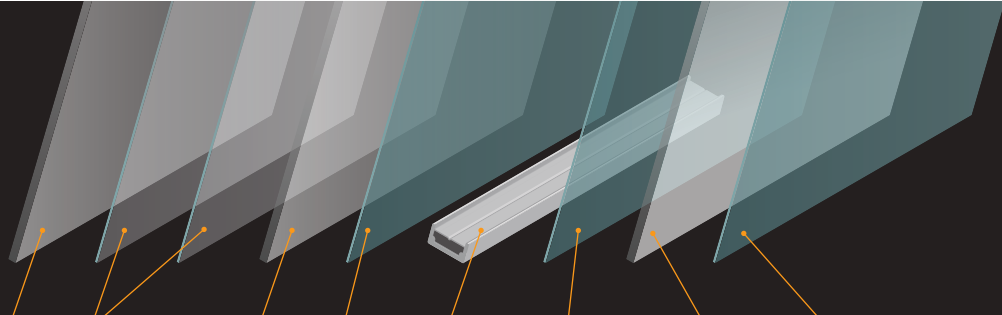

3mm float glass

Two layers of noise reducing and tear resistance foil

3mm float glass

Heat reflecting coating

Krypton gas filling

Heat reflecting and sun protective coating

6 mm toughened safety glass

Titan Glass self-cleaning glass

**U<sub>g</sub>: 0,9 W/m<sup>2</sup>K**

**U<sub>w</sub>: 1,2 W/m<sup>2</sup>K**

## AVAILABLE SIZES [cm]

<b>C4A</b>	<b>F4A</b>	<b>F6A</b>	<b>M4A</b>	<b>M6A</b>	<b>M8A</b>	<b>M10A</b>	<b>P6A</b>	<b>P8A</b>	<b>S6A</b>	<b>S8A</b>	<b>U4A</b>	<b>U8A</b>
55x98	66x98	66x118	78x98	78x118	78x140	78x160	94x118	94x140	114x118	114x140	134x98	134x140

**ULTIMA  
DOES IT  
BETTER**

[www.dakea.com](http://www.dakea.com)



**CE** 15  
EN 14351-1:2006  
+A1:2010

